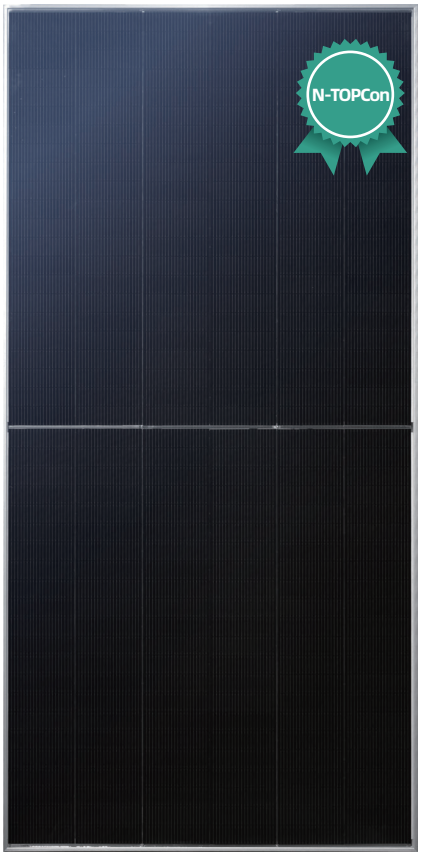


PHONO

650-670w

Draco Matrix Series

N-TOPCON HIGH EFFICIENCY 264-16BB-W-WG


Bloomberg NEW ENERGY FINANCE Tier1 TOP PERFORMER 2025 kiwa PV MODULE RELIABILITY SCORECARD

Product Characteristics

- Boosting Power Output with Gap Reflective Film Technology.

Extraordinary Product Performance

- Up to 30% additional power yield benefited from bifacial technology and up over 80% cell bifaciality
- Competitive high-temperature performance with ameliorated temperature coefficient
- Better weak illumination response, higher power generation with N-TOPCon 5.0 technology

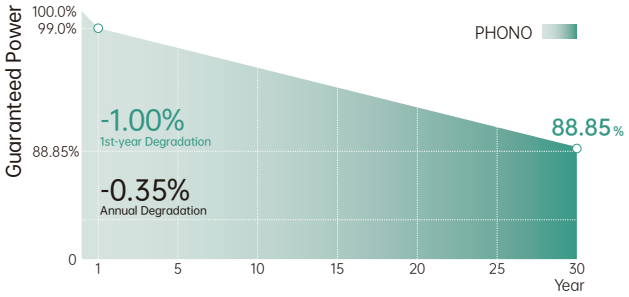

15-year Product Warranty

30-year Linear Performance Warranty

Higher Quality Reliability

- N-type with lower LID and LeTID
- Industry-leading cell processing technology and dual glass contributes to excellent anti-PID characteristic
- First-year degradation is less than 1.0%, with linear degradation of 0.35 per year for 30 years

Wider Application Conditions

- BIPV, vertical installation, snowfield, high-humidity area, windy and dusty area
- Safer and easier handling during transportation and installation

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001
2015 / Quality management system

ISO 14001
2015 / Standards for environmental management system

ISO 45001
2018 / International standards for occupational health & safety

GL-EN-E-VERSION 2026.03.30 © PHONO SOLAR CO., LTD. ALL RIGHTS RESERVED

www.phonosolar.com / info@phonosolar.com

Electrical Typical Values

Model	1000V	PS650L8GF-22/WNQ		PS655L8GF-22/WNQ		PS660L8GF-22/WNQ		PS665L8GF-22/WNQ		PS670L8GF-22/WNQ	
	1500V	PS650L8GFH-22/WNQ		PS655L8GFH-22/WNQ		PS660L8GFH-22/WNQ		PS665L8GFH-22/WNQ		PS670L8GFH-22/WNQ	
Testing Condition		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)		650	498	655	502	660	505	665	509	670	513
Rated Current (Impp)		15.77	12.70	15.84	12.76	15.91	12.81	15.98	12.87	16.05	12.93
Rated Voltage (Vmpp)		41.24	39.19	41.37	39.31	41.50	39.44	41.62	39.56	41.75	39.69
Short Circuit Current (Isc)		16.54	13.32	16.62	13.39	16.69	13.44	16.76	13.50	16.84	13.56
Open Circuit Voltage (Voc)		49.08	46.99	49.23	47.14	49.38	47.28	49.53	47.42	49.68	47.57
Module Efficiency (%)		24.06		24.25		24.43		24.62		24.80	

STC (Standard Testing Conditions): Irradiance 1000W/m², AM 1.5, Cell Temperature 25°c

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/s

BNPI

Maximum Power (Pmax)	716	721	727	732	738
Optimum Operating Current (Impp)	17.37	17.43	17.52	17.59	17.68
Optimum Operating Voltage (Vmpp)	41.24	41.37	41.50	41.62	41.75
Short Circuit Current (Isc)	18.22	18.29	18.38	18.45	18.55
Open Circuit Voltage (Voc)	49.08	49.23	49.38	49.53	49.68

BNPI:Front Side Irradiation 1000W/m², Back Side Reflection Irradiation 135W/m² , AM 1.5, Ambient Temperature 25℃

Mechanical Characteristics

Cell Type	Monocrystalline
Dimension (L × W × H)	Length: 2382mm (93.78 inch) Width: 1134mm (44.65 inch) Height: 30mm (1.18 inch)
Weight	32.0kg (70.55 lbs)
Glass	2.0mm/2.0mm Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm² (IEC), (+): 530mm,(-): 430mm or Customized Length
Junction Box	IP 68 Rated

Temperature Ratings

Voltage Temperature Coefficient	-0.23%/°C
Current Temperature Coefficient	+0.04%/°C
Power Temperature Coefficient	-0.26%/°C
Power Tolerance	0~+3%
NOCT	42±2°C
Bifaciality	85±5%


Absolute Maximum Rating


Operating Temperature	From -40 to + 85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	35A
PV Module Classification	II
Fire Rating (IEC61730)	C
Maximum System Voltage	DC 1000V/1500V


Packing Configuration

Container	40' HQ
Pcs/Container	720
Pcs/Pallet	36
Pallets/Container	20

Electrical Characteristics

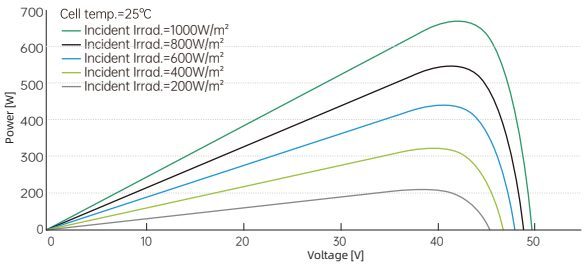

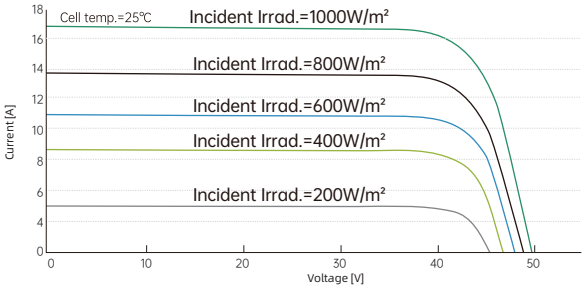

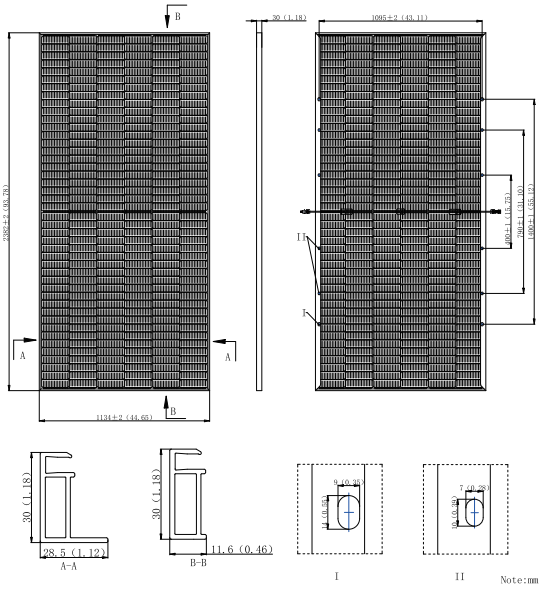

PHONO

PHONO SOLAR TECHNOLOGY CO., LTD. reserves the right to make necessary adjustments to the information described herein at any time without further notice. The specifications and certificates contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Please be sure to use the most recent version of data.